


Beständigkeitstabelle / *Resistance table* FLOWSTOP

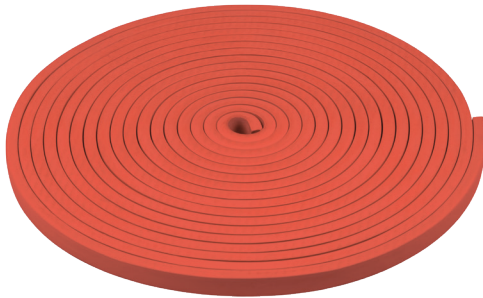

Chemikalie / <i>Media</i>	Beständig + <i>resistant +</i>	bedingt beständig +/- <i>conditionally resistant +/-</i>
Seifenlauge / <i>Soap suds</i>	■	
Natronlauge / <i>sodium hydroxide</i>	■	
Kalilauge / <i>potassium hydroxide</i>	■	
Mineralöl 15W40 / <i>mineral oil 15W40</i>	■	
Motoröl 0W40 / <i>motor oil 0W40</i>	■	
Hydrauliköl HVLP 46 / <i>hydraulic oil HVLP 46</i>	■	
Salzwasser 3-4% NaCl / <i>sea water 3-4% NaCl</i>	■	
Chlorwasser 0,95-1 mg/l / <i>chlorine water 0,95-1 mg/l</i>	■	
Chlorwasser 10 mg/l (Stoßchlorung) <i>chlorine water 10 mg/l (shock chlorination)</i>	■	
Natriumcarbonat / <i>sodium carbonate</i>	■	
Bitumen / <i>bitumen</i>	■	

Weitere Medien auf Anfrage / *further media on request*

Stand: 04-2022